

TRIBIKE HYBRID



Orthopedics stamp

ORDER

OFFER

REFERENCE

DATE

Please complete and send this form by e-mail to: export@trirideitalia.it

TECHNICAL FEATURES

- | | |
|---|---|
| 1 - Electronics and software by Triride | 8 - Cylindrical battery 36 V |
| 2 - Pedal Assist PAS | 9 - Disc brake + V brake |
| 3 - Display LCD Basic with 5 levels of assistance | 10 - Stainless steel frame |
| 4 - Electronic assistance to start/on slopes | 11 - Speed with engine support max 25 Km/h |
| 5 - Seven-speed gearbox | 12 - Adjustable pedaling position |
| 6 - Weight: 11 Kg approx (without battery) | NB: After each adjustment check the chain length |
| 7 - 16" or 20" rim and double inner tube | |

For any special need or customisation, please contact the company

USER'S PERSONAL DATA**

Name _____
Surname _____
Mobile _____
E-mail _____
Age _____
Pathology _____


Note

WHEELCHAIR FEATURES

Brand _____
Model _____
Front tubes diameter _____ mm
Seat width _____ cm
Seat depth (b) _____ cm
Toe to front tube distance (a)*** _____ cm
Ground to knee height (d) _____ cm
Arms to shoulder length (c) _____ cm
User's weight _____ kg

Footrest Fixed Internal
 Removable External

*** For wheelchairs with removable footrests, measure as per "a"
from toe to front tube

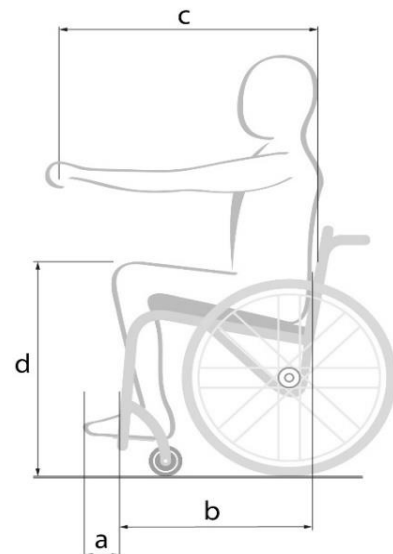

TRIBIKE CONFIGURATION

Wheel		16" City <input type="checkbox"/>	16" Cross <input type="checkbox"/>		standard
		20" City <input type="checkbox"/>	20" Cross <input type="checkbox"/>		standard
Electronics	BS-O-080	Hybrid to manual Tribike - Conversion pack (Cruise control + deactivation of pedaling assistance On/Off)		<input type="checkbox"/>	optional
Pedals	TR-B-032	120mm		<input type="checkbox"/>	standard
	TR-B-021	140mm		<input type="checkbox"/>	standard
	TR-B-004	155mm		<input type="checkbox"/>	standard
Handlebar stem	BS-O-221	Fixed 60mm		<input type="checkbox"/>	standard
	TR-B-090	Fixed 80mm 40 degree		<input type="checkbox"/>	optional
	TR-B-091	Fixed 100mm 40 degree		<input type="checkbox"/>	optional
	BS-C-441	Fixed 120mm 40 degree		<input type="checkbox"/>	optional
Frame colour	BS-O-217-N	Black Ral 9005		<input type="checkbox"/>	standard
	BS-O-217-R	Red Ral 3020		<input type="checkbox"/>	standard
	BS-O-217-W	White Ral 9003		<input type="checkbox"/>	optional
	BS-O-217-G	Yellow Ral 1023		<input type="checkbox"/>	optional
	BS-O-217-A	Orange Ral 2004		<input type="checkbox"/>	optional
	BS-O-217-B	Blue Ral 5017		<input type="checkbox"/>	optional
	BS-O-217	RAL on request N° _____		<input type="checkbox"/>	optional

OPTIONALS

Cylindrical battery 36V 7Ah USB (252Wh)	BS-R-344	<input type="checkbox"/>		optional
Central stand	BS-O-201	<input type="checkbox"/>		optional
Central arch stand	BS-O-083	<input type="checkbox"/>		optional
Lateral stand	BS-O-278	<input type="checkbox"/>		optional
Rearview mirror <input type="checkbox"/> LHS <input type="checkbox"/> RHS	BS-O-229	<input type="checkbox"/>		optional
Carry trailer for rigid wheelchair Rear axle diameter _____cm	BS-O-251	<input type="checkbox"/>		optional
Carry trailer for foldable wheelchair	BS-O-257	<input type="checkbox"/>		on request
Waterproof leg cover	BS-O-214	<input type="checkbox"/>		optional
Ring stoppers for Triride arms	BS-O-114	<input type="checkbox"/>		optional
Laser customized engraving on the frame (only for titanium and black frame)	BS-O-174	<input type="checkbox"/>		optional
Digital customized engraving on the frame	BS-O-156	<input type="checkbox"/>		optional
Custom logo sticker on the frame	BS-O-157	<input type="checkbox"/>		optional
Front light activated from display	BS-O-081	<input type="checkbox"/>		optional
Front light 1200 Lumen	BS-O-232	<input type="checkbox"/>		optional
Front light USB	BS-O-198	<input type="checkbox"/>		optional
Rear light USB	BS-O-180	<input type="checkbox"/>		optional
Rear axle extension (please fill and attach the specific form)	BS-O-015	<input type="checkbox"/>		on request

* Prices are intended for the public and without VAT

**Mandatory fields for warranty

NB: The company reserves the exclusive right to make changes on the models, without notification, if considered useful for the improvement of the product.